

511, 717  
Rec'd PCT/PTO 24 APR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)


PCT

(10) International Publication Number  
WO 03/089367 A2

- (51) International Patent Classification: B68C 1/04, 1/02, 1/16
- (74) Agent: BROOKES BATCHELLOR LLP; 102-108 Clerkenwell Road, London EC1M 5SA (GB).
- (21) International Application Number: PCT/GB03/01654
- (22) International Filing Date: 16 April 2003 (16.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0208660.1 16 April 2002 (16.04.2002) GB  
0303169.7 12 February 2003 (12.02.2003) GB
- (71) Applicants and  
(72) Inventors: KEMPSELL, David [GB/GB]; Little Duskin Farm, Covet Lane, Kingston, Canterbury, Kent CT4 6JS (GB). WHITE, Margaret, Lesley [GB/GB]; Little Duskin Farm, Covet Lane, Kingston, Canterbury, Kent CT4 6JS (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: IMPROVEMENTS IN OR RELATING TO SADDLES

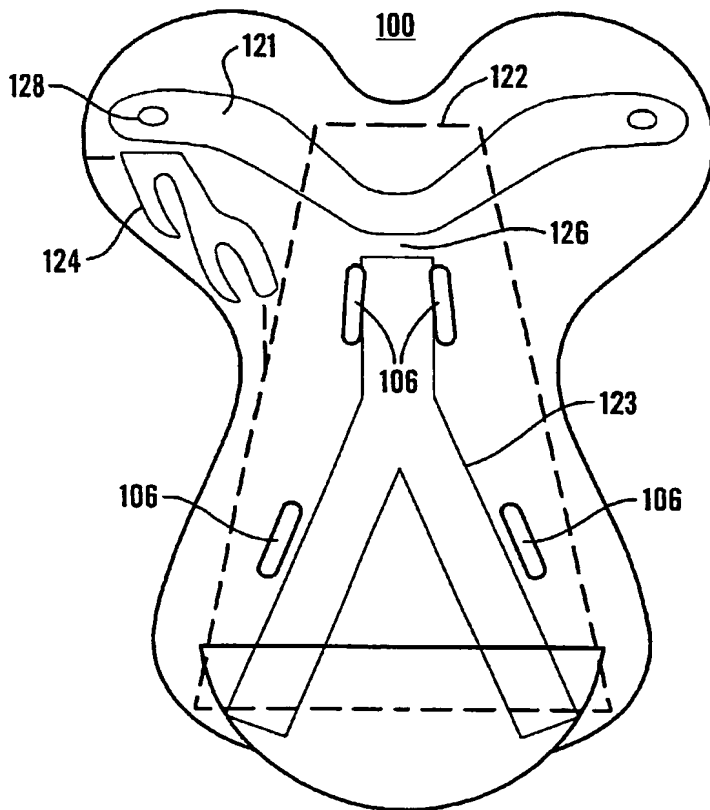

(57) Abstract: The present invention relates to a modular saddle. There is provided a saddle having a saddle tree unit, a saddle flap unit and a panel unit, wherein the panel unit and saddle flap unit are removably securable to the saddle tree unit. The flap unit comprises two flap components each having a sweat flap and saddle flap. Each flap component is removable from the saddle tree in one piece. The panel unit includes plates, which extend the bearing surface of the saddle tree, and prevent the formation of pressure points. In another aspect of the present invention there is provided a flexible tree made from a polyurethane resin. The tree further includes a Y-shaped carbon fibre strengthening bar, which enables the tree to flex laterally, but not longitudinally.

WO 03/089367 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Improvements in or relating to saddles

The present invention relates to improvements in or relating to saddles. In particular, the present invention relates to a modular saddle having interchangeable units, and a novel saddle tree construction.

Traditionally, a saddle comprises a relatively solid, usually wooden, saddle tree structure, which is used to transfer the weight of the rider evenly over the horse's back via two padded panels, one on each side of the horse's backbone. The panels cushion the horse. Saddle trees are made in several width fittings to accommodate horses of different sizes. A particular problem with traditional saddles is that a solid tree restricts the movement of the horse's shoulders. It is known to provide a substantially flexible tree. However, this does not support the rider's weight sufficiently, and strengthening of the tree is required. A tree-less saddle is also known, but again this provides no support for the rider's weight.

A seat is formed on top of the tree from foam or other soft materials, to cushion the rider. The girth webs and straps, stirrup fixings and panels are permanently fixed to the saddle tree itself. These fixings, particularly the stirrup fixings can protrude from the underside of the tree and cause pressure points, which are damaging to the horse.

A conventional saddle has a flap component on each side of the tree/seat, which separates the rider's leg from the horse. A conventional flap comprises a separate saddle flap and sweat flap. The sweat flap lies against the horse and is secured to the corresponding saddle panel. The saddle flap lies on top of the corresponding sweat flap and is secured to the saddle tree. The front portion of the upper saddle flap usually comprises a knee roll, which cushions the rider's knee. It is therefore beneficial to provide flaps of different lengths to accommodate riders having different leg lengths.

The individual components making up a traditional saddle are usually stitched, stapled or nailed, and glued together, i.e. the components cannot be removed without destroying the saddle.

5 A saddle is usually custom-made to fit a particular horse and rider. The shape of the tree and length of the flap, for example, will be specific to the shape of the horse's back, and the length of the rider's leg. The saddle flaps will also be selected for the particular discipline of riding that is required. For example, the flaps of a show jumping saddle will be secured at a different angle with respect to the tree than the  
10 flaps of a dressage saddle. A finished saddle will therefore only be suitable for a limited number of horses - which have similarly shaped backs. A separate saddle will also be required for each riding discipline. Saddles are expensive to produce, and as a result are often sold second-hand. This results in horses being ridden with ill-fitting saddles, which can damage a horse's back and shoulders.

15 The present invention seeks to provide a saddle that can be inexpensively tailored to an individual horse and rider, and that is versatile in that it can be easily altered for use on a different horse, or for a different riding discipline. The present invention also seeks to provide a saddle that produces minimal pressure points on a horse's  
20 back.

According to the present invention there is provided a saddle for use on a horse's back comprising a combination of a saddle tree unit having a cantle end and a pommel end, a saddle flap unit, and a panel unit, wherein the panel unit and saddle flap unit are removably securable to the saddle tree unit.

In the preferred embodiment, the saddle flap unit comprises two flap components, one securable to each side of the saddle tree unit, wherein each flap component is  
25 securable in at least two different orientations. This provides that the saddle can be easily altered for the particular rider using it, and the length of their leg.

Suitably, each flap component comprises an upper saddle flap and a lower sweat flap.

Preferably, the saddle flap unit is bolted to fixings located in the saddle tree unit. It is therefore possible to remove the saddle flaps and sweat flaps by removing the bolts  
5       securing the flap unit.

In the preferred embodiment, the saddle tree unit is formed from a flexible material allowing lateral flexing of the tree unit. Lateral flexing allows the horse to move more freely and reduces any damage to the horse's shoulders.  
10

Suitably, the material is a polyurethane resin.

In the preferred embodiment, the saddle tree unit further comprises a Y-shaped strengthening bar wherein the forks of the Y-shape are directed towards the cantle end  
15       of the saddle tree unit. Such strengthening means that whilst lateral flexing is not prevented, the tree cannot flex significantly in a longitudinal direction, and that therefore the weight of the rider is fully supported.

Suitably, the strengthening bar is made from carbon fibre. Carbon fibre is particularly  
20       suitable as it is lightweight, therefore adding little weight to the horse's back. It has, however, sufficient strength to support and disperse the rider's weight over the tree. Traditionally, carbon fibre has been unsuitable for use in saddles as it is difficult to attach components to by stapling or stitching, for example. In the present invention, the carbon fibre bar is incorporated into a resin, to which other components can easily  
25       be stitched or stapled.

In the preferred embodiment, the pommel end of the tree unit is angularly adjustable. Traditional saddles are produced in a limited range of width fittings to correspond to horses having withers of different heights and widths. Preferably, the tree unit  
30       further comprises a head plate located near to the pommel end. The head plate

defines the shape of the pommel of the saddle and ensures that the saddle does not contact with the horse's withers.

5 The head plate is formed of a substantially rigid material and is, in one embodiment, formed integrally within the saddle tree unit, in which case the pommel angle can be adjusted by compression of the saddle tree unit by means of an externally applied force, such as in a press. Alternatively, the head plate is secured in an aperture located in the tree unit, in which case, advantageously, a range of head plates are manufactured in order to produce a range of pommel angles. As the tree unit itself is  
10 flexible, a wide range of pommel angles can be produced.

In the preferred embodiment, the saddle tree unit includes two recessed portions, one at either side of the tree, near to the pommel end, into which stirrup bars are securable. The saddle tree unit may further include apertures located at both the  
15 pommel end and the cantle end, through which a girth web is fixable. Alternatively, the saddle flap unit may further comprise a girth web secured to either the sweat flap or saddle flap.

Advantageously, the panel unit further comprises at least one panel plate. The plate  
20 acts to further distribute the weight of the rider by extending the surface area of the tree, and also provides fixing points for the panel itself. Preferably, the panel plates are flexible, to allow the horse to move freely.

The saddle will also have a seat attached to an upper surface of the saddle tree in  
25 order to cushion the rider.

According to another aspect of the present invention, there is provided a saddle tree comprising a tree body having a pommel end and a cantle end, the tree body being formed from a flexible material and a generally Y-shaped strengthening bar, wherein  
30 the forks of the Y-shape are directed towards the cantle end of the saddle tree.

Preferably, the strengthening bar is made from carbon fibre.

In a preferred embodiment, the pommel end of the saddle tree is angularly adjustable. In order to achieve this, the saddle tree advantageously further comprises a head plate  
5 located near to the pommel end. The head plate is preferably malleable and is bendable to produce the required pommel angle. The head plate may be secured in an aperture located in the saddle tree. Alternatively, it may be formed integrally within the saddle tree. Suitably, the head plate is made from malleable steel.

10 In a preferred embodiment, the saddle tree further includes two recessed portions, one at either side of the tree near to the pommel end, into which stirrup bars are securable.

Advantageously, the saddle tree further comprises at least one sheet of bi-directional carbon fibre.

15

In a preferred embodiment, the saddle tree further comprises apertures located at both the pommel end and the cantle end, through which a girth web is fixable.

A specific embodiment of the invention will now be described by way of example  
20 only and with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a traditional saddle;

Figure 2 is a view of a traditional saddle showing the tree, panels and flaps;

Figure 3 is a view of an embodiment of a saddle flap unit in accordance with the  
25 present invention;

Figure 4 is a view of an embodiment of the fixings for a flap unit in accordance with the present invention;

Figure 5 is a view of the embodiment of Figure 4 showing the corresponding fixing points on a tree unit;

30 Figure 6 is a view of an embodiment of a tree unit in accordance with the present invention;

Figure 7 is a view of the embodiment of Figure 6 including an embodiment of a flap unit and an embodiment of a panel unit in accordance with the present invention; and Figure 8 is a view of an embodiment of a panel unit in accordance with the present invention.

5

To illustrate the present invention, it will be helpful to describe the construction of a conventional saddle. With reference to Figure 1, there is shown a traditional saddle 10. Each component of saddle 10 described below is normally made from leather, but can also be made from synthetic materials. Saddle 10 has a seat 11, a pommel 13 and a cantle 1. Saddle 10 is secured to a horse by a girth 3.

10

With reference to Figure 2, seat 11 is supported by a saddle tree 30, having a steel head plate. The head plate is attached to tree 30 at a point equidistant between the tree points 31. Saddle tree 30 is traditionally made from wood or polypropylene. Saddle tree 30 is extended by panel 4, which is flocked to cushion the horse and to conform to the shape of a particular horse's back. Tree 30 will compress the flocking and may cause unevenness which will result in pressure points being formed on the horse's back. Panel 4 is fixed to tree 30 by stitching or stapling, and gluing.

15

Girth straps 8 are attached to saddle 10 by means of girth webs (not shown), which are fixed directly to saddle tree 30. Girth straps 8 lie on a sweat flap 6, which is fixed to panel 4 by means of stitching or stapling, and gluing. Sweat flap 6 cannot therefore be removed without destroying the saddle. Sweat flap 6 rests against the horse. A saddle flap 5 lies over sweat flap 6 and girth straps 8. Saddle flap 5 is attached to saddle 10 by nails or other permanent fixing via saddle tree 30. The front portion of saddle flap 5 is normally made of softer leather covering a sheet of foam, to support the rider's knee. This area is known as the knee roll. The knee roll can however, be formed in sweat flap 6 instead of saddle flap 5.

20

25

30

A stirrup leather 7 lies on top of saddle flap 5. Stirrup leather 7 is removably fixable to a stirrup fixing (not shown). The stirrup fixing is riveted to tree 30. The length of

stirrup leather 7 is adjustable to allow for riders with different leg lengths. Stirrup leather 7 secures stirrup 2.

Turning to the present invention and with reference to Figure 3 there is shown one component 20 of a saddle flap unit having girth webs 12, 14 and girth straps 18, 19. Flap fixing points 15, 16, 17 are used to secure component 20 to a saddle tree having corresponding tree fixing points. Component 20 is fixed to a saddle tree such that it is easily removable. In the preferred embodiment fixing is by means of a threaded bolt. This provides that a user may use the same saddle for different riding disciplines. For example, the disciplines of show jumping and dressage have different requirements for saddle flaps. A dressage saddle provides for the rider having a longer length of stirrup leather, and a more extended leg, and therefore the flap is oriented differently with respect to the seat of the saddle and will be of a different shape. The rider can use different flap unit components 20 on the same saddle.

15

With reference to Figure 4, flap fixing points 15, 16, 17 also allow component 20 to be rotated with respect to the saddle seat. This provides for use of the saddle by riders having different leg lengths.

With reference to Figure 5, component 20 is fixable to a saddle tree 100 (as shown in Figure 6) at tree fixing points 22, 23, 24. Tree fixing points 22, 23, 24 correspond to flap fixing points 15, 16, 17

Girth webs 12, 14 are arranged such that an even pressure is exerted over the saddle. Fixing points 15, 16, 17 provide the attachment points for girth webs 12, 14. Girth webs 12, 14 secure two girth straps 18, 19. In the preferred embodiment, girth straps 18, 19 have a series of apertures which engage a pin in a girth (not shown). Each end of the girth is securable to two girth straps. The girth is used to secure the saddle on a horse's back by means of one of the apertures in each girth strap 18, 19 and the pins of the girth. Accordingly, the girth will pull the saddle down at its centre. In this

30

way, if one girth strap 18, 19 is tighter than its partner, the pull of the girth will remain centred and keep the saddle secure on the horse's back.

5 The construction of the preferred embodiment differs from a traditional saddle 10 in that the flap unit comprises a single component 20 having a sweat flap, saddle flap and girth webs 12, 14. This unit is removable in one piece from the rest of the saddle.

10 With reference to Figure 6 there is shown a saddle tree 100 having two ends. At the first end, the pommel end, there is provided a head plate 121. The other end of tree 100 forms the cantle end. Tree 100 is substantially made from a polyurethane resin that is flexible. This resin is primarily used as it provides flexibility whilst also providing a surface to which the other units of the present invention can be removably secured.

15 A particularly suitable resin has been found to have a Shore hardness of approximately 90 on the "A" scale. For example, polyurethane resin PMC 790 produced by "Smooth-On", Philadelphia, USA, is suitable. The resin can be cast using pour-moulding techniques. In the preferred embodiment, head plate 121 is integrally moulded in the polyurethane resin. This is preferred as it results in a tree 20 100 having smooth underside, and therefore reduces pressure points. In this case, the mould is a two-part silicon mould. The components that are to be moulded into the resin must be cleaned and prepared with a solution that allows a strong bond to form between the component and the resin. For example, "Shellac" is effective for this purpose. Alternatively, an aperture may be formed in the underside of tree 100 in 25 which head plate 121 can be secured. Preferably, head plate 121 is secured to tree 100 using recessed bolts at fixing points 128, which screw into fittings pre-moulded into tree 100.

30 Head plate 121 defines the width of the pommel end of tree 100. In the preferred embodiment, head plate 121 is made from malleable steel and can therefore be bent into shape to define a tree 100 of an appropriate width fitting for a particular horse.

This requires that tree 100 has a certain degree of flexibility. Traditional saddles having semi-rigid polypropylene trees can produce only a limited range of pommel widths as the tree will become too stressed if the head plate is bent to angles which differ significantly from the angle to which the tree was originally moulded. Typically, a range of 30° can be produced. The flexibility of tree 100 allows for a larger range of width fittings, with a range as large as 70° being possible.

The flexibility of the resin will allow tree 100 to flex in a lateral direction. This ensures that the horse can move freely and is not unduly restricted by the saddle. When a horse is in motion, its back forms a very different shape to when it is static. When a saddle is fitted to a specific horse, it is produced to conform to the horse's back when it is static. Therefore, when a horse is moving, a traditional saddle will exert particular pressure on the shoulder area. Tree 100 is laterally flexible and therefore exerts significantly less pressure on the horse when it is in motion.

In the preferred embodiment, tree 100 further comprises an integral strengthening bar 123. This ensures that tree 100 can support and distribute the rider's weight, without reducing the lateral flexibility of tree 100. To achieve this, bar 123 is Y-shaped, where the fork of the Y-shape is directed towards the cantle end of tree 100. Preferably, bar 123 is made from carbon fibre that is a minimum of 6mm thick and roughly 30mm wide. Suitably, bar 123 is made from 8 layers of 375g/m<sup>2</sup> bidirectional carbon fibre bonded with boat-building-class epoxy resin. This provides strong support to tree 100 without increasing the weight. Most of the articulation will be at a junction 126 between bar 123 and head plate 121.

It is also possible to introduce into saddle tree 100 a single layer of bi-directional carbon fibre sheet 122 above and below all of the integrated components to ensure integrity between components and also to control stiffness. The size and shape of sheet 122 can be tailored to ensure that there is some resistance to excessive twisting of tree 100.

In one embodiment, tree 100 further includes apertures 106. Apertures 106 are used to secure girth webs (not shown). The webbing weaves up through one of apertures 106 from the underside of tree 100 and down through an adjacent aperture 106. The web is prevented from slipping by screws, which are located between apertures 106.

5 The girth webs provide a secure mounting point for girth straps. In the preferred embodiment, as discussed above, the girth webs are secured to flap unit 20, and are hence removable from saddle tree 100.

Tree 100 further comprises an aperture for a stirrup bar 124 on each side of tree 100.

10 Each stirrup bar 124 is located at the pommel end of tree 100 and acts to removably secure a stirrup leather to the saddle. The aperture ensures that the underside of tree 100 remains as one continuous surface and that no additional pressure points are created. The location of stirrup bars 124 and the flexibility of tree 100 mean that when the pommel end of tree 100, having integral or recessed head plate 121, is bent

15 to adjust the pommel angle, stirrup bars 124 will be correspondingly relocated relative to the rest of the saddle. This provides that the relative orientation of the saddle components remains the same.

To further ensure that no pressure points are produced, a front plate 101 is secured to each side of tree 100 to cover the area in which stirrup bar 124 is located, as shown in Figure 7. In the preferred embodiment, front plates 101 are made from a flexible material and are fixed to stirrup bar 124. Front plate 101 also acts as a locating device for a panel 130 (Figure 8). In the preferred embodiment, plate 101 is made from 1.5mm polypropylene. Additionally there may advantageously be included a back

20 plate 102 located on the underside of each side of tree 100 at the cantle end of the tree. Plate 102 is preferably made from mild steel and acts like a "burr" on a western style saddle. A burr is an extension of a tree, to which a panel is attached. However, a traditional burr is unsuitable for use in English saddles. Plate 102 inserts into a slot 131 on top of panel 130. Plates 101, 102 also act to further disperse the pressure of

25 the rider and saddle on the horse's back.

30

With reference to Figure 8, a panel unit 130 is provided to support the saddle structure on the horse's back and distribute the weight of the rider. Stitch line 107 defines a flocked area 134 of panel 130. In the traditional saddle shown in Figure 1, it is only the flocked area 4 that transfers the weight of the rider. Panel 130 comprises three  
5 pieces of leather or fabric. The first two pieces define the shape of the panel and the third 132 adds depth to the panel. The upper surface of panel 130 is made from a thicker material than the lower surface.

Panel unit 130 is fixed to a panel plate 103, which lies on the top surface of panel 130.  
10 Preferably, panel plate 103 is stitched to panel unit 130. Plate 101 is located between plate 103 and the panel top. Plate 103 therefore defines a "pocket" into which plate 101 fits. Panel plate 103 follows the shape of the horse's back, and acts to further disperse the weight of the rider, by extending the bearing surface beyond that achieved by a tree alone. Panel plate 103 is made from a flexible material so that the  
15 movement of the horse is not restricted. In the preferred embodiment, panel plate 103 is made from 1.5mm polypropylene.

From the above description it can be seen that the present invention provides a saddle that is modular but that also retains the appearance of a traditional English saddle.  
20 Each component of the saddle can be easily removed and replaced providing a saddle that conforms well to the requirements of the horse and of the rider. The saddle benefits the horse in that the tree can be easily tailored to the shape of its back and will also flex with the horse's movement. Pressure points are also minimised. The saddle benefits the rider in that any length of flap can be combined with the particular  
25 tree that is produced for their horse. The present invention also provides cost benefits in that the same basic tree and panel structure can be used for different riding disciplines by changing the flaps.

Claims

1. A saddle for use on a horse's back comprising a combination of a saddle tree unit having a cantle end and a pommel end, a saddle flap unit, and a panel unit, wherein the panel unit and saddle flap unit are removably securable to the saddle tree unit.
2. A saddle as claimed in Claim 1 wherein the saddle flap unit comprises two flap components, one securable to each side of the tree unit, wherein each flap component is securable in at least two different orientations.
3. A saddle as claimed in Claim 2 wherein each flap component comprises an upper saddle flap and a lower sweat flap.
4. A saddle as claimed in any one of claims 1 to 3 wherein the saddle flap unit is bolted to fixings located in the tree unit.
5. A saddle as claimed in any one of claims 1 to 4 wherein the saddle tree unit is formed from a flexible material allowing lateral flexing of the tree unit
6. A saddle as claimed in Claim 5 wherein the material is a polyurethane resin.
7. A saddle as claimed in Claim 6 wherein the resin has a Shore hardness of approximately 90 on the "A" scale.
8. A saddle as claimed in any one of claims 5 to 7 wherein the saddle tree unit further comprises a Y-shaped strengthening bar wherein the forks of the Y-shape are directed towards the cantle end of the saddle tree unit.
9. A saddle as claimed in Claim 8 wherein the strengthening bar is made from carbon fibre.

10. A saddle as claimed in any one of the preceding claims wherein the pommel end of the saddle tree unit is angularly adjustable.
- 5 11. A saddle as claimed in any one of the preceding claims wherein the saddle tree unit further comprises a head plate located near to the pommel end.
12. A saddle as claimed in Claim 11 wherein the head plate is malleable.
- 10 13. A saddle as claimed in Claim 11 or Claim 12 wherein the head plate is securable in an aperture located in the saddle tree unit.
14. A saddle as claimed in Claim 11 or Claim 12 wherein the head plate is formed integrally within the saddle tree unit.
- 15 15. A saddle as claimed in any one of claims 12 to 14 wherein the head plate is formed from malleable steel.
16. A saddle as claimed in any one of the preceding claims wherein the saddle tree unit further comprises two recessed portions, one at either side of the tree near to the pommel end, into which stirrup bars are securable.
- 20 17. A saddle as claimed in any one of the preceding claims wherein the saddle tree unit further comprises at least one sheet of bi-directional carbon fibre, applied to at least one of the upper and lower surfaces.
- 25 18. A saddle as claimed in any one of the preceding claims wherein the saddle tree unit further comprises girth web apertures located at both the pommel end and the cantle end.

19. A saddle as claimed in any one of claims 1 to 17 wherein the saddle flap unit further comprises a girth web.
- 5 20. A saddle as claimed in any one of the preceding claims wherein the panel unit further comprises a panel plate.
21. A saddle as claimed in Claim 20 wherein the panel plate is formed from a flexible material.
- 10 22. A saddle as claimed in any one of the preceding claims further comprising a seat attached to an upper surface of the saddle tree.
- 15 23. A saddle tree comprising a tree body having a pommel end and a cantle end, the tree body being formed from a flexible material and a generally Y-shaped strengthening bar wherein the forks of the Y-shape are directed towards the cantle end of the saddle tree.
- 20 24. A saddle tree as claimed in Claim 23 wherein the strengthening bar is made from carbon fibre.
- 25 25. A saddle tree as claimed in Claim 23 or Claim 24 wherein the pommel end of the saddle tree is angularly adjustable.
26. A saddle tree as claimed in any one of claims 23 to 25 further comprising a head plate located near to the pommel end.
27. A saddle tree as claimed in Claim 26 wherein the head plate is malleable.
- 30 28. A saddle tree as claimed in Claim 26 or Claim 27 wherein the head plate is securable in an aperture located in the saddle tree.

29. A saddle tree as claimed in Claim 26 or Claim 27 wherein the head plate is formed integrally within the saddle tree.

5 30. A saddle tree as claimed in any one of claims 26 to 29 wherein the head plate is formed from malleable steel.

31. A saddle tree as claimed in any one of claims 23 to 30 further including two recessed portions, one at either side of the tree near to the pommel end, in which stirrup bars are securable.

10

32. A saddle tree as claimed in any one of claims 23 to 31 further comprising a sheet of bi-directional carbon fibre applied to at least one of the upper and lower surfaces.

15 33. A saddle tree as claimed in any one of claims 23 to 32 further comprising girth web apertures located at both the pommel and the cantle end.

34. A saddle as claimed in any one of claims 1 to 7 having a saddle tree as claimed in any one of claims 23 to 33.

20

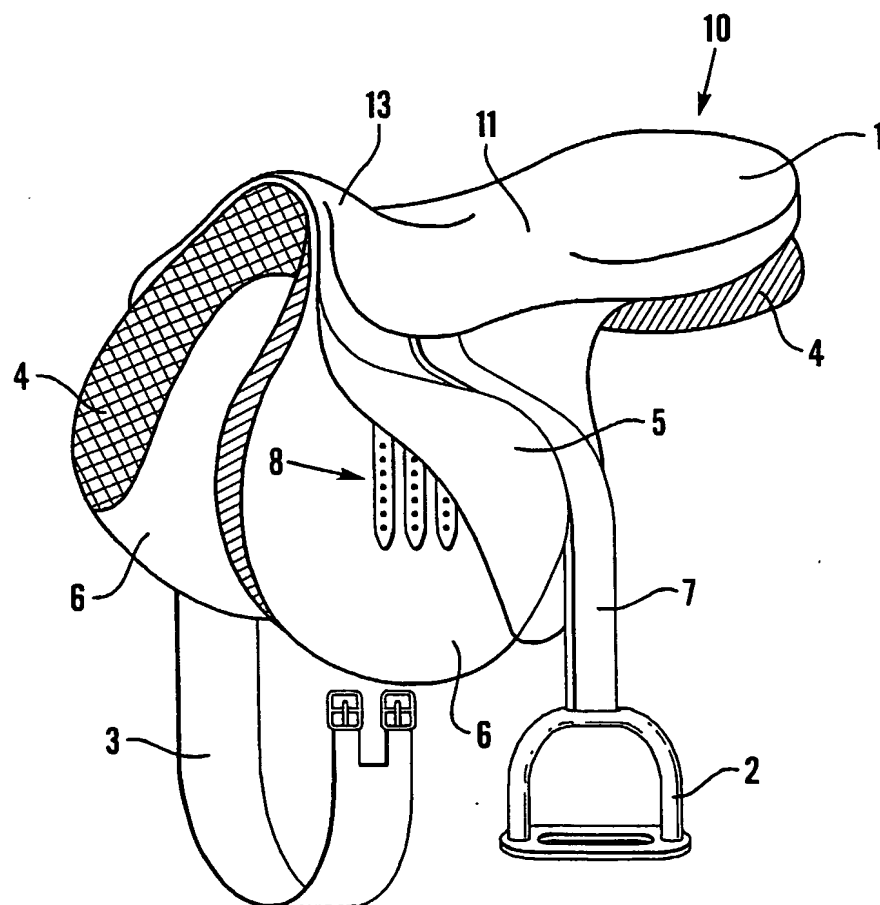


Fig. 1



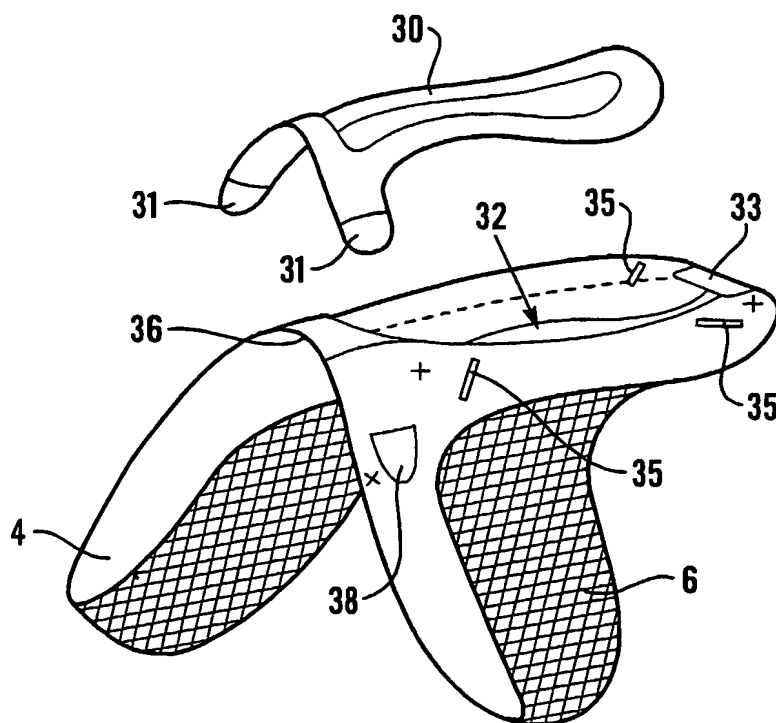



Fig.2

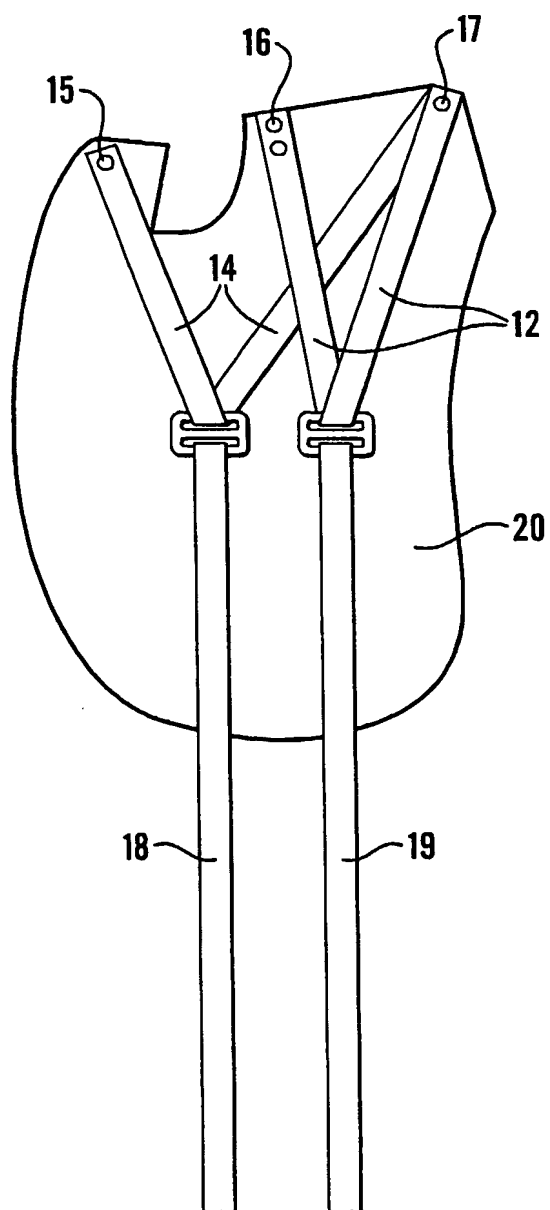

**Fig.3**

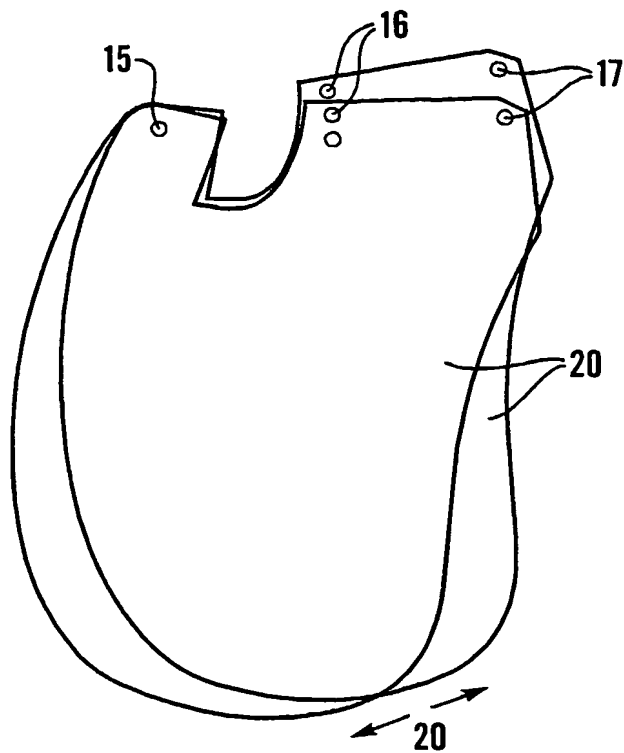

**Fig. 4**

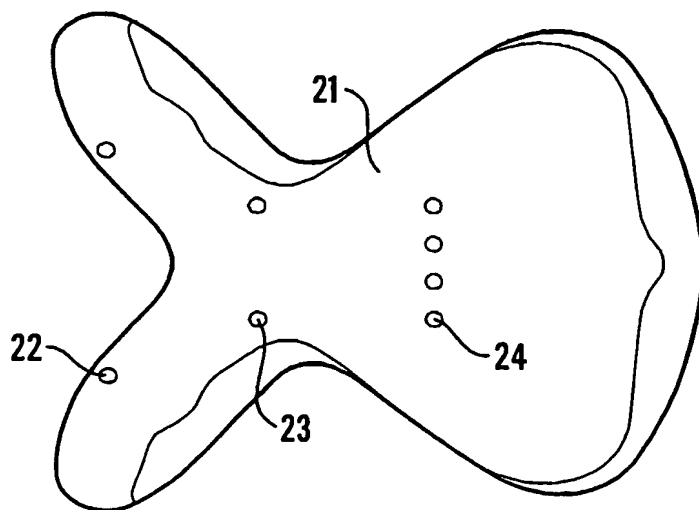

**Fig. 5**

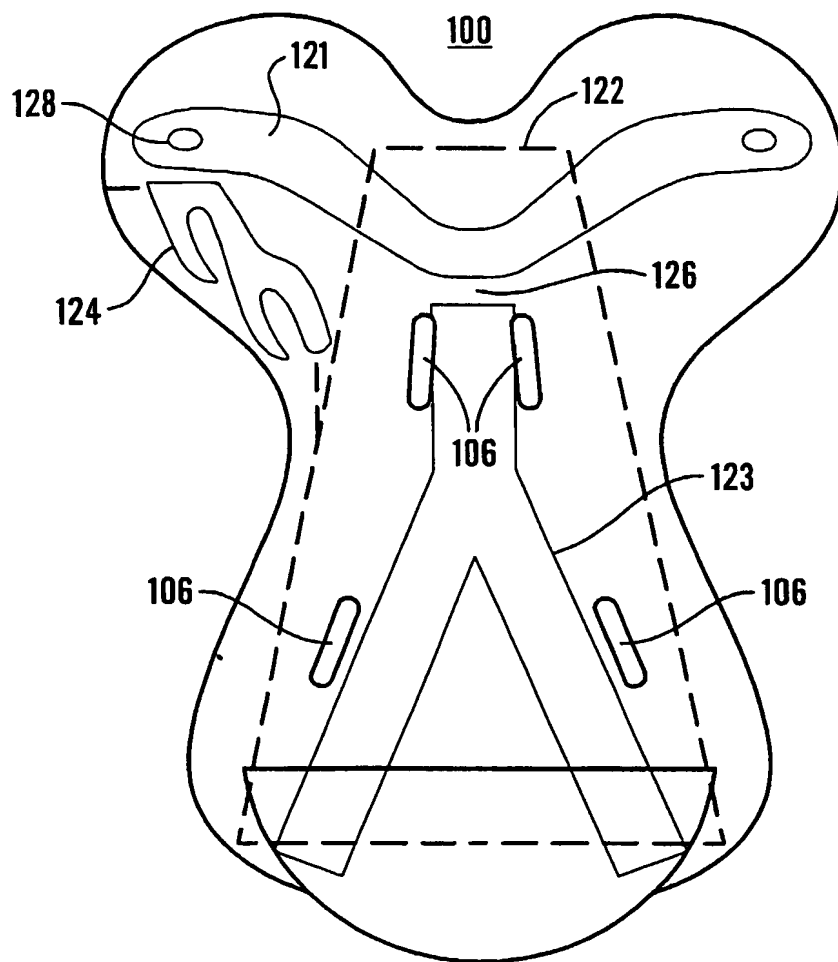


Fig.6


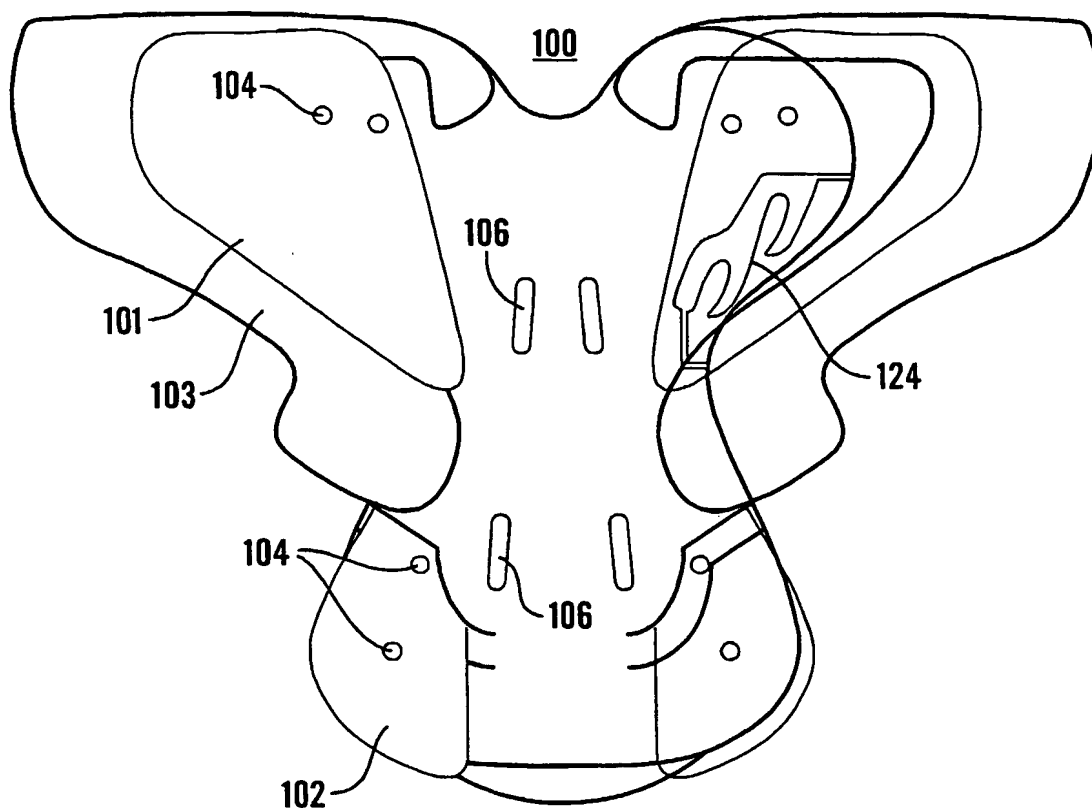


Fig. 7

**Fig. 8**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

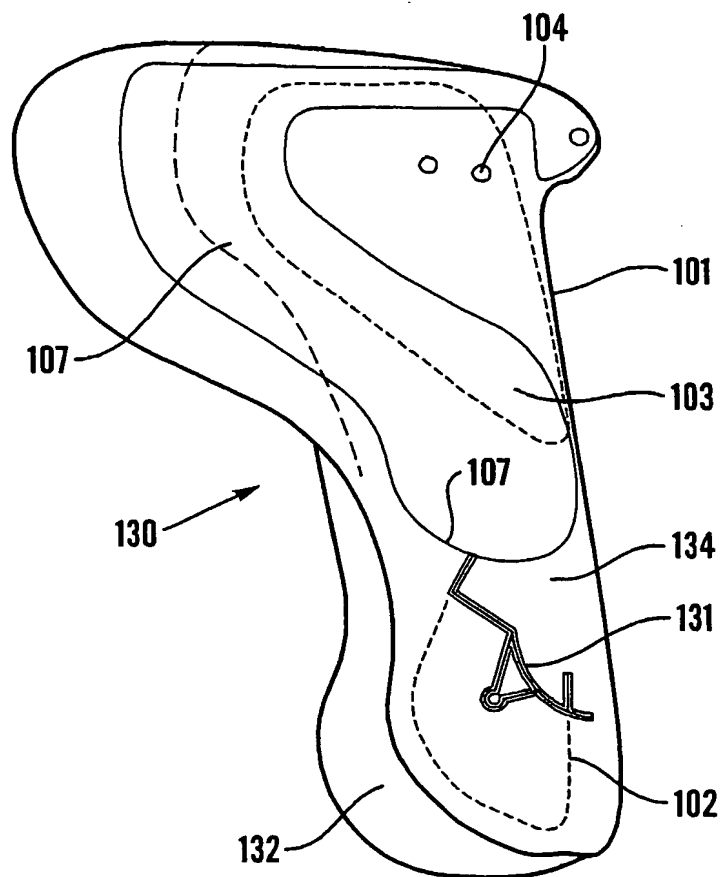

(43) International Publication Date  
30 October 2003 (30.10.2003)


PCT

(10) International Publication Number  
**WO 2003/089367 A3**

- (51) International Patent Classification<sup>7</sup>: **B68C 1/04**, (74) Agent: **BROOKES BATCHELLOR LLP**; 102-108 Clerkenwell Road, London EC1M 5SA (GB).  
1/02, 1/16
- (21) International Application Number:  
PCT/GB2003/001654
- (22) International Filing Date: 16 April 2003 (16.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0208660.1 16 April 2002 (16.04.2002) GB  
0303169.7 12 February 2003 (12.02.2003) GB
- (71) Applicants and  
(72) Inventors: **KEMPESELL, David** [GB/GB]; Little Duskin Farm, Covet Lane, Kingston, Canterbury, Kent CT4 6JS (GB). **WHITE, Margaret, Lesley** [GB/GB]; Little Duskin Farm, Covet Lane, Kingston, Canterbury, Kent CT4 6JS (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: RIDING SADDLE

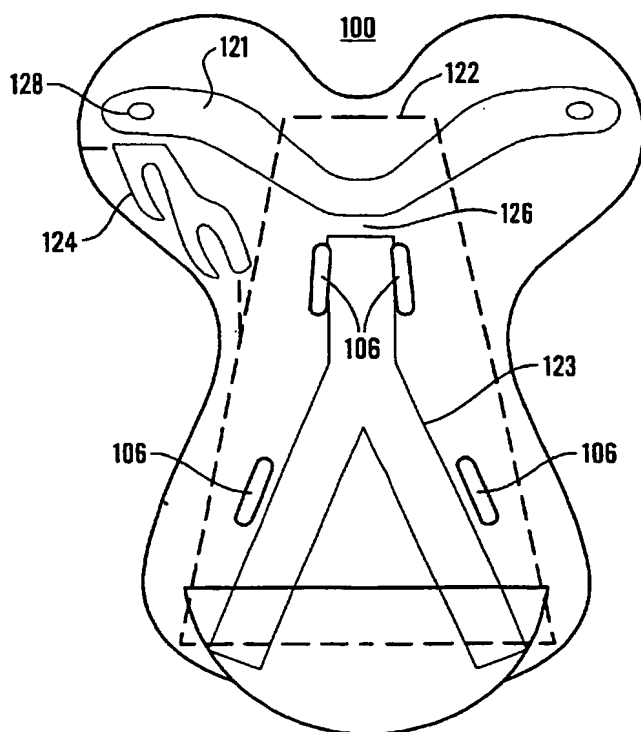

(57) Abstract: The present invention relates to a modular saddle. There is provided a saddle having a saddle tree (100) unit, a saddle flap unit (20) and a panel unit (130), wherein the panel unit (130) and saddle flap unit (20) are removably securable to the saddle tree unit (100). The flap unit (20) comprises two flap components each having a sweat flap and saddle flap. Each flap component is removable from the saddle tree (100) in one piece. The panel unit (130) includes plates, which extend the bearing surface of the saddle tree (100), and prevent the formation of pressure points. In another aspect of the present invention there is provided a flexible tree (100) made from a polyurethane resin. The tree (100) further includes a Y-shaped carbon fibre strengthening bar (123), which enables the tree to flex laterally, but not longitudinally.

WO 2003/089367 A3



**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**  
1 April 2004

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 03/01654

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B68C1/04 B68C1/02 B68C1/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B68C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 162 760 A (ANDRE CHARLES) 20 July 1973 (1973-07-20)	1-3, 20-22
Y	the whole document	4-7, 10-19
Y	US 4 414 791 A (FREEZE EUGENE A) 15 November 1983 (1983-11-15)	4
A	column 2, line 16 - line 17 column 8, line 52 - line 58	2
Y	US 5 343 674 A (BROWN ROY L) 6 September 1994 (1994-09-06) column 5, line 36 - line 38; figure 1	19
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 January 2004

Date of mailing of the international search report

29. 01. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Sundell, O

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 03/01654

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	GB 1 439 761 A (WHITE POLYTECHNIQUES LTD) 16 June 1976 (1976-06-16) page 2, line 16 page 2, line 31 - line 35 page 2, line 68 page 3, line 80 - line 83 -----	5-7, 11, 12, 14, 15 8, 17, 23
Y	US 2 034 474 A (GUIDO KNETSCH) 17 March 1936 (1936-03-17) page 1, right-hand column, line 17 - line 19 -----	11, 13
Y A	WO 98 06662 A (HUGGINS ANDREW ; SAVABACK LIMITED (GB)) 19 February 1998 (1998-02-19) page 8, line 26 - line 27; figure 2 -----	16 5, 17
Y A	GB 2 071 986 A (DUNLOP LTD) 30 September 1981 (1981-09-30) page 1, line 107 - line 115 -----	5, 17 18
Y	AT 406 767 B (WITTMANN SABINE) 25 August 2000 (2000-08-25) page 2, line 25; claim 1 -----	10
Y	US 5 195 306 A (HADLOCK WILLIAM B) 23 March 1993 (1993-03-23) figure 1 -----	18
A	DE 19 76 063 U (GOEDICKE ERNST) 11 October 1967 (1967-10-11) page 2, paragraph 2 -----	6
A	US 3 780 494 A (NANKIVELL E) 25 December 1973 (1973-12-25) figure 1 -----	18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/01654

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2162760	A	20-07-1973	FR 2162760 A5	20-07-1973
US 4414791	A	15-11-1983	AU 543491 B2	18-04-1985
			AU 8366282 A	27-01-1983
			CA 1177259 A1	06-11-1984
			DE 3228000 A1	24-02-1983
			DE 8221339 U1	14-04-1983
			GB 2102666 A , B	09-02-1983
US 5343674	A	06-09-1994	AT 197444 T	11-11-2000
			AU 672106 B2	19-09-1996
			AU 6392694 A	01-05-1995
			CA 2172724 A1	13-04-1995
			DE 69426268 D1	14-12-2000
			DE 69426268 T2	15-03-2001
			DK 720586 T3	27-11-2000
			EP 0720586 A1	10-07-1996
			ES 2150987 T3	16-12-2000
			JP 9503406 T	08-04-1997
			WO 9509808 A1	13-04-1995
			US 5435116 A	25-07-1995
GB 1439761	A	16-06-1976	DE 2329436 A1	20-12-1973
			FR 2200842 A5	19-04-1974
			IT 990633 B	10-07-1975
			US 3888070 A	10-06-1975
			BE 800757 A1	01-10-1973
US 2034474	A	17-03-1936	NONE	
WO 9806662	A	19-02-1998	AU 3949297 A	06-03-1998
			WO 9806662 A2	19-02-1998
			GB 2322281 A	26-08-1998
GB 2071986	A	30-09-1981	EP 0040294 A1	25-11-1981
AT 406767	B	25-08-2000	AT 213598 A	15-01-2000
US 5195306	A	23-03-1993	NONE	
DE 1976063	U		NONE	
US 3780494	A	25-12-1973	US 3712024 A	23-01-1973

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/GB 03/01654

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

**FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210**

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-4,19-22

1.1. Claims: 1-3

Adjustable and removable saddle flaps and panels

1.2. Claim : 4

Saddle flap fixing device

1.3. Claims: 19-21

Integrated units for simplified removal

1.4. Claim : 22

Seat

2. Claims: 5-9,17,23-34

Flexible saddle tree construction

3. Claims: 10-15

Adjustable pommel end of a saddle tree

4. Claims: 16,18

Attachments means on a saddle tree

Please note that all inventions mentioned under item 1, although not necessarily linked by a common inventive concept, could be searched without effort justifying an additional fee.